



DESCRIPTIONS



Capacity: 3 x 1/1 GN



Trays insertion: Lengthwise



Dimensions: 620 x 650 x H 670 mm



Control panel: Digital



Positive cycle: 8 kg
Negative cycle: 5 kg

GAS

R452A

Climate class

Class N


Insulation thickness: 50 mm

Refrigerant power: 490 W



Electric power: 550 W

CONTROL PANEL DESCRIPTION

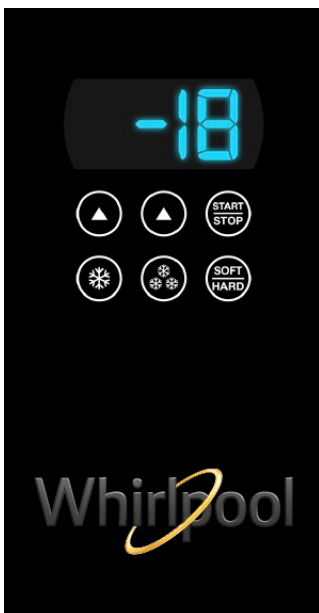

	Blast chilling key
	Deep freezing key
	Hard blast chilling or Soft deep freezing key
	Start/stop (on/off) key
	Increase value key
	Decrease value key

MANUFACTURING FEATURES

- Time or core probe control
- Internal glossy finish
- External scotch-brite finish
- 60 mm high density polyurethane foam insulation, CFC and HCFC-free
- Core probe included
- Removable grids-rack for easy cleaning
- Air condensation
- Electric defrosting
- Automatic cold holding at the end of cycle

DIMENSIONS

	BLAST CHILLER	PACKAGE
Width	620 mm	mm
Depth	650 mm	mm
Height	670 mm	mm
Weight/volume		64 kg/0.36 m ³

POWER SUPPLY

Power loading	0.5 kW
Cooling power	0.46 kW
Max. power loading	0.5 kW
Voltage	230 V ~ 1N 50 Hz
Feed cable section	Cable included
Capacity	3 x 1/1 GN
Pitch between the trays	67 mm

